


Electric-powered- No fumes,
fuel or diesel engine noise.

Pre-assembled and ready to
operate. Just make an
electrical connection.

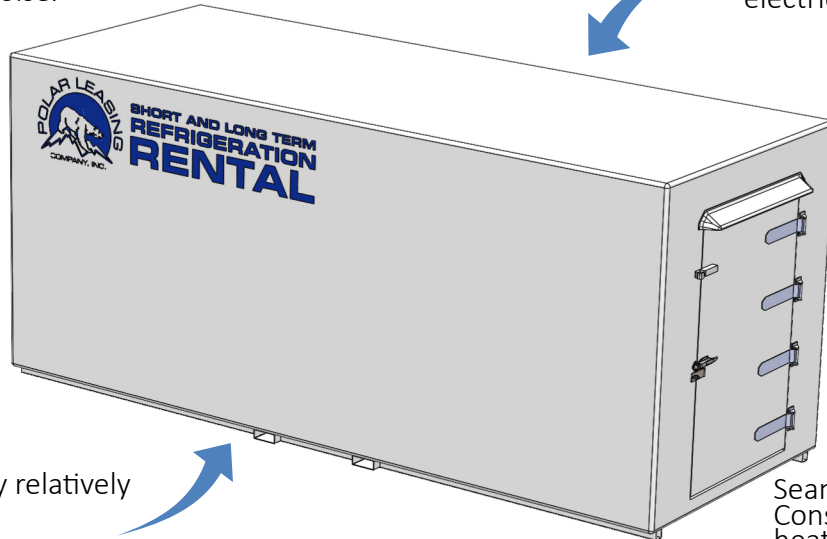


Can be placed on any relatively
even surface.

Seamless Fiberglass
Construction is immune to
heat, cold, and bad
weather.


Approvals:	▪ NSF listed ▪ UL Class I foam	
Insulation:	▪ Polyisocyanurate foam: 4" thick X 2.0 PCF nominal density	
Fiberglass:	▪ 100 mil thick FRP composite – exterior ▪ 80 mil thick FRP composite – interior	
Exterior Finish:	▪ Seamless fiberglass ▪ 2 part epoxy paint	
Interior Finish:	▪ NSF approved flooring – non-skid floor finish – 29 grade sand aggregate ▪ Rounded corners, sanitary ▪ Anti-Microbial Gel-Coat	
	▪ Heavy Duty non-skid floor ▪ Lockable Door latch ▪ Hasp lock (ext. door) ▪ Safety Release Handle ▪ Magnetic gasket ▪ Door Closer ▪ Sweep Seal ▪ Vinyl Strip Curtain ▪ Galvanized Frame	▪ Light switch/pilot light ▪ Rain cap exterior doors ▪ Digital thermometer ▪ Interior lighting ▪ Crowned roof ▪ Stainless Steel Kick Plate ▪ Forklift Capable frame
Specs:	▪ Flame spread index < 25 ▪ Smoke developed index < 185 ▪ Floor Strength: 900 lb/ft² ▪ Forklift Slots: 3" x 8" SQ TU, 37" apart on center	

Box Layout

A820 Plan View

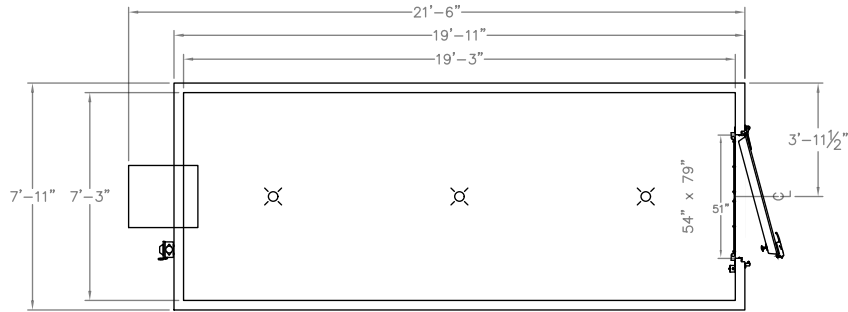

A820 Elevation View

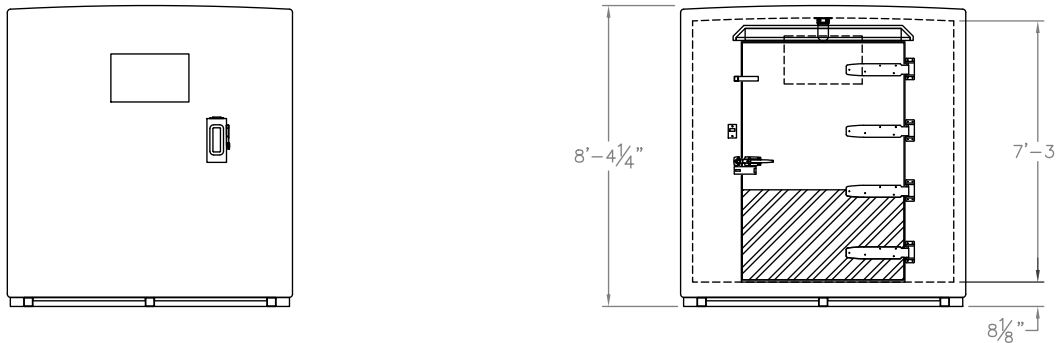

Specifications

Model	A820
Exterior Width	7'-11"
Exterior Length	19'-11"
Exterior Height	8'-4"
Interior Width	7'-3"
Interior Length	19'-3"
Interior Height	7'-3"
Interior Area	140 ft ²
Interior Volume	1018 ft ³
LED Lights	3
Condensing Unit	KES12A33A
Horsepower	1 TON
Temperature	65°F to 80°F / 18°C to 27°C
Refrigerant	R-410a
Electrical Supply	208-230/110V
Phase	1
Cycle	60 Hz
MCA	16.3 A
70° Capacity	12,000 BTU/Hr @ 90°F
Door Opening	51" x 77 3/4"
Empty Weight	4000 lb.