


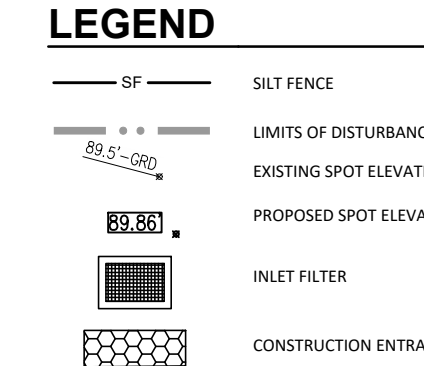

1. THE CONTRACTOR IS ADVISED THAT THE SOIL EROSION AND SEDIMENT CONTROL MEASURES ARE SUBJECT TO HUDSON-ESSEX-PASSAIC COUNTY SOIL CONSERVATION DISTRICT REVIEW AND APPROVAL AND SHALL BE VERIFIED PRIOR TO THE INSTALLATION OF THE SAME.
2. SOIL EROSION AND SEDIMENT CONTROL MEASURES SHALL BE INSTALLED AS DEEMED NECESSARY BY THE ENGINEER AND THE HUDSON-ESSEX-PASSAIC COUNTY SOIL CONSERVATION DISTRICT.
3. CONTRACTOR TO CLEAN INLET FILTER AFTER EVERY STORM.
4. FILTER FABRIC, TO BE REMOVED AFTER FINAL GRADING AND ESTABLISHMENT OF VEGETATION.
5. INDIVIDUAL LOT INGRESS/EGRESS POINTS MAY REQUIRE A STABILIZED CONSTRUCTION ENTRANCE CONSISTING OF NO. 3 STONE (1" TO 2") TO PREVENT OR MINIMIZE TRACKING OF SEDIMENTS.
6. SOIL TO BE EXPOSED OR STOCKPILED FOR A PERIOD OF GREATER THAN 14 DAYS, AND NOT UNDER ACTIVE CONSTRUCTION, MAY BE REQUIRED TO BE TEMPORARILY MULCHED, AND SEEDED OR OTHERWISE PROVIDED WITH VEGETATIVE COVER. THIS TEMPORARY COVER SHALL BE MAINTAINED UNTIL SUCH TIME WHEREBY PERMANENT ESTABLIZATION IS ESTABLISHED.
7. PAVED ROADWAYS MUST BE KEPT CLEAN AT ALL TIMES. DO NOT UTILIZE A FIRE OR GARDEN HOSE TO CLEAN ROADS UNLESS THE RUNOFF IS DIRECTED TO A PROPERLY DESIGNED AND FUNCTIONING SEDIMENT BASIN. WATER PUMPED OUT OF THE EXCAVATED AREAS CONTAINS SEDIMENTS THAT MUST BE REMOVED PRIOR TO DISCHARGING TO RECEIVING BODIES OF WATER USING REMOVABLE PUMPING STATIONS, SUMP PITS, PORTABLE SEDIMENTATION TANKS AND/OR SILT CONTROL BAGS.
8. FOR SPECIFICS ON FOUNDATION AND FOOTINGS CONSTRUCTION, SEE ARCHITECTURAL DRAWINGS.
9. TAKE EVERY PRECAUTION NECESSARY TO PRECLUDE DAMAGE TO EXISTING STRUCTURES, FACILITIES AND UTILITIES DUE TO LOSS OF LATERAL SUPPORT AND FOR CONSTRUCTION LOADING.
10. ALL INFORMATION SHOWN OR NOTED FOR EXISTING FACILITIES, GRADES, ROADWAYS AND MATERIALS ARE APPROXIMATE AND THE CONTRACTOR SHALL BE RESPONSIBLE FOR CHECKING ALL INFORMATION THAT MAY AFFECT HIS WORK. CONTRACTOR SHALL NOTIFY THE ENGINEER IF ANY DISCREPANCIES EXISTSS PRIOR TO PROCEEDING WITH CONSTRUCTION.
11. CONTRACTOR'S OBLIGATIONS, DUTIES AND RESPOSIBILITIES INCLUDE BUT ARE NOT LIMITED TO CONSTRUCTION MEANS & METHODS, SEQUENCE, TECHNIQUES AND PROCEDURES NECESSARY FOR PERFORMING AND COORDINATING THE WORK IN ACCORDANCE WITH THE CONTRACT DOCUMENTS.
12. ALL GRADING OPERATIONS SHALL PROVIDE FOR POSITIVE DRAINAGE AWAY FROM ALL BUILDINGS AND STRUCTURES AND SHALL ELIMINATE PONDING AREAS.
13. THE CONTRACTOR IS NOT PERMITTED TO STOCKPILE EXCAVATED MATERIALS OVER ANY UTILITY LINES, THE STOCKPILED MATERIALS SHOULD BE PLACED SUFFICIENTLY AWAY FROM THE EDGE OF ANY EXCAVATION TO PREVENT CAVING OF THE TRENCH WALL AND TO PERMIT ADEQUATE ACCESS ALONG THE TRENCH.
14. THE CONTRACTOR SHALL BE RESPONSIBLE FOR THE DISPOSAL OF ALL MATERIALS EXCAVATED OF WHATEVER NATURE AT HIS OWN EXPENSE, THE CONTRACTOR MUST NOT DEPOSIT THE EXCESS MATERIAL S WITHIN MUNICIPAL PROPERTY LIMITS WITHOUT EXPRESS PERMISSION FROM THE MUNICIPALITY. MATERIALS MUST BE DISPOSED IN ACCORDANCE WITH APPROVED NJDOT, NJDEP METHODS AND MEANS, DOCUMENTATION SHALL BE PROVIDED TO THE BUILDING DEPARTMENT AS PART OF THE CONSTRUCTION PERMIT.
15. USE STOCKPILE AREA WHILE EXCAVATING FOR FOOTINGS, FOUNDATION & SLAB OF REAR OF THE DWELLING, ONCE AREA IS EXCAVATED, PROCEED TO DISPOSE OF EXCESS SOILS. ONCE IN THE FRONT, CONTRACTOR TO EXCAVATE & REMOVE EXCESS SOIL AS NECESSARY TO MEET PROPOSED ELEVATION.

SOIL REMOVAL PLAN	
NEW TWO FAMILY DWELLING 156 MAIN STREET BLOCK 89, LOT 21 TOWNSHIP OF WEST ORANGE ESSEX COUNTY, NEW JERSEY 07052	
Scale: 1" = 20'	Date: 08/23/2023
Drawn by: CDA	Project No.: SC21-06
	
SANDRA CACERES, P.E. N.J. PROFESSIONAL ENGINEER, LICENSE No. 24GE04562600 830 NORTH AVENUE WEST WESTFIELD, NEW JERSEY 07090 PHONE No. 908 296-3956	