

PLANNING REPORT + JUSTIFICATIONS OF VARIANCES

PROPOSED MIXED COMMERCIAL DEVELOPMENT


470 EAGLE ROCK AVENUE

BLOCK 153, LOT 38

TOWNSHIP OF WEST ORANGE, ESSEX COUNTY, NEW JERSEY

DRESDNER ROBIN PROJECT NO.: 12210-001

PREPARED BY
Dresdner Robin
30 Montgomery Street Suite 510
Jersey City, NJ 07302



Mallory Clark, PP, AICP
Professional Planner
NJ Lic. # 33LI00648200

DATE

February 24, 2025

Revised September 05, 2025

Revised January 09, 2026

Revised March 06, 2026

Revised April 3, 2026

Appendices Added May 26, 2026

An application has been filed for the above noted property with the West Orange Zoning Board of Adjustment for the approval of a Preliminary and Final Major Site Plan with a d(3) conditional use variance for a fast food restaurant and approval of bulk “c” variances for ~~minimum lot area for drive-up window~~, maximum impervious coverage, location of parking in front yard, maximum number of façade signs, maximum façade sign area, and tree canopy preservation. The subject property is located in the B-2 General Business (“B-2”) District.

Revised version 5.0 of this report considers completed testimony and project changes based on the following documents:

- Revised civil plans by Dynamic Engineering dated 11.25.2025
- Demolition and Tree Removal Plan Exhibit by Dynamic Engineering dated 03.06.2026, revised 04.01.2026
- Landscape Plan Exhibit by Dynamic Engineering dated 03.06.2026, revised 04.01.2026
- Revised Traffic Impact Study by Dynamic Engineering dated 12.04.2025
- Board Planner’s Report version 5.0 dated 12.12.2025

New and/or revised text is *orange, bolded and italicized*

I. PROPERTY DESCRIPTION

The subject property is a corner lot identified as Tax Lot 38 on Block 153 fronting Eagle Rock Avenue to the north and Rosney Terrace to the west. The subject property has a total lot area of 45,713 square feet (1.05 acres), approximately 248 feet of frontage along Eagle Rock Avenue, and approximately 182 feet of frontage along Rosney Terrace. The property is currently improved with a vacant 1-story frame building that was previously a commercial use (formerly known as China Gourmet).

II. PROJECT DESCRIPTION

The purpose of this application is to *adaptively reuse* the existing building and develop the subject property with a new 1-story commercial building with 2 individual (but attached) restaurants with separate entrances. The subject property will be developed to accommodate one dine-in restaurant and a fast-food restaurant with a drive-up window. The proposed project will also include 48 surface parking spaces along all sides of the subject property that include 1 EV parking space, signage for both restaurants, as well as landscaping along Eagle Rock Avenue, Rosney Terrace, and at the rear of the property.

III. CONDITIONAL USE

Per §25-24.2.b.2(i), the B-2 District permits fast food restaurants as a conditional use subject to the following;

1. A site plan, prepared by a New Jersey licensed architect or engineer, shall be submitted to the Planning or Zoning Board, as required by this chapter and state law, and the plan shall show all standards, established herein for fast food restaurant operation as a conditional use, have been satisfied.

- A site plan of the proposed project from an NJ licensed engineer is submitted to the Zoning Board.

Project complies.

2. No part of any building or structure used as a fast-food restaurant nor any driveway entrance or exit to or from the same shall be located within 500 feet of any line of any lot upon which is located another fast-food restaurant.

- The Township Zoning Code designates fast-food restaurant as the following:

***"FAST FOOD RESTAURANT** Shall mean the retail sale of ready-to-eat foods and beverages for on and/or off premises consumption, whenever the foods and beverages are available upon a short waiting time, and orders are placed by the customer at a counter, and primarily served in or on disposable wrappers, containers or plates, and where there is a seating capacity of more than 15 individuals. This does not include restaurants which have "take-out" as accessory to a traditional restaurant."*

- The driveway on the subject property serving the fast-food use is located approximately 360 feet from the driveway to a shopping center housing a Jersey Mike's Subs and Chipotle, which appear to qualify as fast-food restaurants per the Zoning Code's definition. It should be noted that neither of these establishments have a drive-thru window. **Project does not meet the condition.**

3. No part of any building or structure used as a fast-food restaurant shall be located within 1,000 feet of any residential district boundary line

- The subject property and the proposed fast-food use abuts the R-6 residential zone to the south (rear property line) and the west (fronting Rosney Terrace). The properties to the north and east of the subject property are located within the B-2 and P-C zones. **Project does not meet the condition.**

4. The minimum size for any lot upon which any fast-food restaurant is located shall be 30,000 square feet, and the minimum street frontage of such lot shall be 200 feet. If a fast-food restaurant is located on a corner lot, the minimum street frontage on each street shall be 200 feet.

- The lot area meets the required threshold at 45,713 square feet and the lot width along Eagle Rock Avenue meets the required 200 feet at 223.45 feet. However, the frontage along Rosney Terrace has an existing width of 182.41 feet. **Project does not meet the condition.**

5. Combined entrance and exit driveways to and from any lot upon which is located a fast-food restaurant shall have an unrestricted width of not less than 24 feet nor more than 30 feet, shall be located not nearer than 20 feet to any lot line and shall be so designed to avoid the need for any existing vehicle to back across or into any portion of a public sidewalk or street. One-way entrance or exit driveways shall have a minimum width of 18 feet.

- The widths of the two combined entrance and exit driveways are 30 feet. The western driveway is located approximately 28.4 feet from the property lot line and the eastern driveway is located approximately 30.58 feet from the side property line. No one-way entrance or exit driveways are proposed. **Project complies.**

6. The minimum distance between driveways on a lot upon which is located a fast-food restaurant shall be 100 feet, measured from the two closest driveway curbs.

- The distance between the driveways from the two closest driveway curbs is approximately 128.2 feet. **Project complies.**

7. The minimum distance of any driveway into the street, of a lot upon which a fast-food restaurant is located, from a street intersection shall be 100 feet, measured from the nearest end of the curb radius of the intersection to the nearest end of the curb radius of the driveway.

- The curb radius of the western driveway is located approximately **13.2** feet from the Rosney Terrace intersection. **Project does not meet the condition.**

8. All fast-food restaurants shall provide suitable areas for storage of trash, designed and constructed to allow no view of the trash storage from the street, to prevent trash from blowing around the site onto adjacent properties or public rights-of-way and to permit safe removal of trash.

- The proposed trash storage located toward the southeast corner of the property will consist of 3 angled 10 feet x 10 feet masonry enclosures and a **board on board** gate **setback 33.4 feet from the rear property line**. **Project complies.**

9. All fast-food restaurants shall provide parking in accordance with § 25-12.2b.

- Both fast food restaurants and restaurants have the same parking standard of 1 space for each 3 seats or stools. The fast-food restaurant offers 18 seats and the restaurant offers 88 seats. Per the standard a minimum of 36 parking spaces are required. The project proposes 48 parking spaces. **Project complies.**

10. *Any lot on which is located a fast-food restaurant must comply with the front yard, side yard, and rear yard requirements for the B-1 or B-2 District in which the lot is located*

- The proposed fast-food restaurant complies with the front, side, and rear yard requirements for the B-2 District. **Project complies.**

IV. VARIANCE JUSTIFICATION AND PROOFS

D(3) Conditional Use Variance: The proposed project does not meet several of the conditional use requirements as outlined above. Accordingly, the project necessitates a conditional use variance pursuant to N.J.S.A. 40:55D-70.d(3). The Board of Adjustment has jurisdiction to grant such variance based on the proofs as established in *Coventry Square vs. Westwood Zoning Board of Adjustment*, 138NJ285 (1994). The New Jersey Supreme Court noted that conditional uses, even when they do not meet with all of the requisite conditions, are nonetheless compatible uses in the zone. The burden of proof is related to whether the site can accommodate the problems or impacts associated with the use even though the conditions and ordinances established to address said impacts are not satisfied.

The majority of the conditions not satisfied under the proposed development are from a metric standpoint, wherein the intent of the limitation or requirement are satisfied from an operational or site circulation standpoint despite a specific numerical threshold not being met.

- Regarding Condition 2, the intent of the ordinance seems to be to prevent a given corridor from being dominated by the fast-food use wherein regular curb cuts and heavier/irregular traffic flows associated with drive-thru functions may accumulate and result in collective negative impacts along the corridor as a whole. While there are other restaurants that meet the Town's definition of fast-food within 500 feet of the subject property, neither of the noted uses have a drive-thru function and both are consolidated within one larger strip-mall property that is significantly set back from the right-of-way and has multiple access driveways along multiple corridors, therefore mitigating potential traffic implications that may arise from the proposed fast-food use. The project site is located a sufficient distance (approximately 386 feet) from the existing establishments and provides driveway access from the opposite side of the

corridor, therefore no substantially negative impacts to overall corridor circulation are anticipated. Additionally, there are no other existing drive-thru uses within 1,000 feet of the site.

- Similarly, Condition 3 in the ordinance establishes a buffer between fast-food uses and residential zones in what is likely an effort to mitigate impacts of a higher-volume use on a nearby low-density residential zone. While the proposed project abuts a residential zone and use to the south and west (across Rosney Terrace), the project does not provide any curb cuts or access points on the Rosney Terrace right-of-way in order to maintain efficient and lower traffic volumes on the residential street. Additionally, the queuing for the proposed drive-thru is set back from the rear property line by approximately 24.33 to 28.67 feet and is buffered from the rear property line by landscape screening and a bypass lane so that temporarily idling cars do not result in an increase in noise or light pollution to the neighboring properties. Where the adjacent single-family structure is located on Lot 1 to the south, the revised landscape buffer has been increased to 17.17 feet at the rear property line.
- The project partially satisfies Condition 4 in that it greatly exceeds the minimum lot area requirement and meets (and exceeds) the 200-foot frontage requirement along Eagle Rock Avenue. However, the subject property does not provide 200 feet of frontage along the Rosney Terrace right-of-way, where the current lot has 182.41 feet of frontage. Again, the intent of this requirement is likely to ensure frontages for this use can accommodate the necessary curb-cuts for a fast-food operation without creating detrimental impacts on traffic flows and circulation patterns. The total lot frontage between both streets is in excess of 400 feet (the combined frontage requirement for 2 rights-of-way), where the existing total is 405.86 feet between the two rights-of-way. Additionally, as there are no curb-cuts proposed on the deficient frontage along Rosney Terrace, the project does not create negative impacts on traffic flows for this street and therefore the intent of the requirement is preserved through the proposed site design.
- The final condition, Condition 7, that the proposed project does not satisfy is the 100-foot setback of a driveway for a fast-food use from an intersection. As fast-food uses typically front commercial corridors, it is likely that the condition was considered as a measure to prevent egress into/out of a fast-food site from disrupting the flow of traffic from an active or high-volume intersection, as it is common to see fast-food uses proposed at the corner of multiple active commercial roadways. Impacts on intersections with timed traffic signals could conceivably be detrimental should the interior site circulation not accommodate a significant enough queue to bring cars quickly out of the main right-of-way. Despite not

having a sufficient setback from the intersection per the requirement, the site provides substantial room for queuing of the drive-thru as it allows vehicles to wrap around the back of the building in order to access this function. The formal drive-thru lane accommodates 8 cars with room for up to an additional 5 cars in the western drive aisle without any disruption to entrance/exit movements at the egress point/curb cut. The application has been revised throughout hearings to designate a pull-up space in front of the drive-through lane in the event that a customer's order is taking longer than average to prepare. This further alleviates potential queuing conflicts by ensuring drive-through traffic can move efficiently without substantial delay/interruption.

Additionally, as previously stated, the road intersecting the commercial corridor is Rosney Terrace - a lower volume street serving a single-family residential neighborhood that is not signalized and allows vehicles to make turns freely onto Eagle Rock Avenue. The lack of setback of the proposed driveway is not likely to create substantial impacts to the flow of traffic from this street and therefore the intent of the condition is not undermined by the proposed site design. It is also worth noting that the project proposes to reuse the two existing curb-cuts and driveways for the site. The site has operated with said non-conforming curb cut for a restaurant use previously without any known nuisance or substantial detriment to general welfare and safety.

V. Bulk "c" Variances

The project requests bulk "c" variances for maximum impervious coverage, location of parking at the front yard, maximum number of façade signs, and maximum façade sign area, concrete curbing within 5 feet of a structure, minimum landscape abutting a residential zone, loading space requirements and tree replacement requirements which may be granted pursuant to N.J.S.A. 40:55D-70.c.(2), wherein the benefits of the proposed project would substantially outweigh any detriments.

*****Version 5.0 of this report removes the request for the minimum lot area variance, as correspondence was provided by Board Counsel on 03.31.2026 indicating that Ordinance 2819-23 was mistakenly codified in eCode 360, despite the ordinance failing to be adopted upon second reading at Council on a vote of 4 against, 1 in favor. Accordingly, the provision is not applicable to the project, and the project now complies with all applicable regulations related to drive-up window uses. No relief is needed related to the drive-through component of the proposed Popeye's.***

The analysis previously conducted related to this variance has been removed from the report.

~~Minimum Lot Area for Drive-Up Window:~~ ~~§25-11.14.j of the West Orange Zoning Code requires that;~~

~~“Any restaurant [containing a drive-up window] must be situated on property consisting of five (5) or more acres and provide ample queuing to ensure that no waiting vehicles are in or on a public thoroughfare or street.”~~

Maximum Impervious Coverage: The project proposes an impervious surface coverage of 75.0% where a maximum impervious coverage of 60% is permitted in the B-2 District. The existing site conditions have a non-conforming 80.9% impervious coverage which will be reduced through the proposed project but will remain non-compliant. The proposed coverage includes partial removal of the existing impervious surface for shrubs, screening trees and ornamental plantings along the south, east, and north of the subject property, thus substantially improving the existing conditions by providing a green buffer from the adjacent residential uses *whereas much of the existing tree canopy in these areas is compromised or dead due to disease.* The reduction in pervious coverage will improve the conditions along these property lines while also improving the aesthetic character of the site along the Eagle Rock Avenue corridor. Additionally, the proposed project will reinvigorate a vacant, deteriorating site along an active commercial corridor through its redevelopment and therefore the benefits of the proposed impervious coverage will outweigh the detriments.

Location of Parking in Front Yard: The project proposes parking in the front yard of the property, where off-street parking is only permitted in the rear or side yards in the B Districts per Section 25-12.1.l. The front yard parking is an existing non-conforming condition as the existing site shows 11 parking spaces fronting Eagle Rock Avenue. The additional parking spaces provided within the front yard are anticipated to be needed in order to provide adequate, compliant parking ~~may yield a slightly higher parking demand on site than a singular restaurant use.~~ *[Note that architectural testimony indicated a single restaurant use in this site could feasibly provide for a 200-seat operation. This alone would yield a parking requirement of 67 spaces per the ordinance, therefore exceeding the requirement of 49 spaces for the combined use as proposed.]* The proposed parking at the front will improve the existing condition by reducing the number of non-conforming spaces to a total of 10 spaces, including 2 ADA accessible spaces. New front yard landscaping will be added to help visually buffer this area from the roadway, and a painted crosswalk from this area to the front door of the proposed building will be added to ensure safe pedestrian access from the spaces to the restaurants. Additionally, other commercial properties along the corridor including the property immediately east of the site have existing non-conforming front yard parking, and therefore the variance will not create a substantial detriment to the existing corridor as

it is consistent with other commercial properties. Overall, the benefits of the front yard parking location will outweigh the detriments.

Maximum Number of Façade Signs: The project proposes four façade signs for the fast-food restaurant and three façade signs for the full-service restaurant, where a maximum of one façade sign is permitted. The property is located on a corner lot, so the additional signs are intended to be visible from both rights-of-way to improve wayfinding. Additionally, the proposed signs will only be visible to the north (Eagle Rock Avenue), west (Rosney Terrace), and east of the property and will not be visible to the residential properties to the south (rear). The proposed signage packages are consistent with the tenants, who are national brands and provide consistent signage and wayfinding across their locations. **Additionally, it is appropriate for signs to be located on multiple facades in the proposed configuration as the project has frontages on multiple rights-of-way and also maintains logo/branding for improved navigability related to the drive-through lane.**

Maximum Façade Sign Area: The project proposes a total sign area of 229 square feet for the two restaurant uses, where a maximum of 120 square feet is permitted. The total area is split among several (7) smaller signs as noted above and therefore the impact if the congregate sign area will not be felt at the level of numerical deviation from the standard. No one individual sign is in excess of the maximum sign area restriction and therefore the overall proposed sign package will present as consistent with the associated uses along a typical commercial roadway.

Concrete Curbing within 5 Feet of a Structure: §25-12.1.B mandates that no concrete or granite block curb may be within 5 feet of a structure whereas the project proposes a concrete curb directly abutting the building edge on the eastern façade. This curb lines the drive-thru window and aisle and is necessary to protect the structure and moving vehicles from clipping the building or drive-thru window when using the drive-thru lane. The benefits of prioritizing overall site safety and public welfare outweigh the detriments.

~~**Minimum Landscaping Abutting a Residential Zone:** The ordinance requires a landscape buffer along property lines where a nonresidential district and a residential district abut. §25-11.3a states that said landscape buffer should be no less than 20 feet, whereas the landscape buffer on the south (rear) property line abutting the R-6 zone provides a buffer of 8.8 feet. While the landscape buffer itself does not meet the 20-foot requirement, active site uses along this property line are buffered by an additional bypass drive lane at the rear of the property which will see minimal utilization throughout the day. This results in the nearest active site component, which is the drive-thru lane, being setback 20.8 feet from the property line therefore meeting the intent of the requirement in minimizing impacts of the commercial use on the adjacent residential property.~~ **Per the most**

recent report from the Board's planner, the ordinance states that the required buffer is applicable when abutting a residential zone. The residential properties to the south are both existing non-conforming residential uses within the B-2 zone. The subject property does not share a property line with a residential zoning district, therefore the requirement is not applicable. For the Board's benefit, the revised plans provide a varying (and improved) landscape buffer of 11.8 FT to the southeast to 23.2 FT at the southwest of the site.

Based on the February 22, 2026 hearing, the project team submitted an OPRA request on the two adjacent residential parcels to ensure neither was granted via a use variance as acknowledged in the ordinance. OPRA requests yielded no prior approval records for either property. Based on the Tax Cards for both properties, the single-family homes were constructed in 1965 (Lot 35, add. 9 Fungus Rd) and 1967 (Lot 1, add. 6 Rosney Ter) and likely predated the current B-2 zoning boundary which appears to be adopted in the 80's based on available Master Plan data on the Township's website. This indicates these parcels were intentionally included in and subsequently maintained in the B-2 district, and the residential buffer standard therefore is not applicable.

Loading Space: The ordinance requires the proposed project to provide one off-street loading space for the proposed uses. The current site plan does not provide a dedicated, striped loading space on the property but accommodates the off-street loading of the relevant truck model as made evident on sheet 19 of the Civil Site Plans, wherein circulation movements for a large delivery truck are provided. The deliveries associated with the proposed commercial uses will be scheduled in coordination with the hours of operation of the fast-food restaurant and restaurant to mitigate any circulation impacts. The delivery vehicle will not prevent the remainder of the site circulation from being functional in any way other than a temporary disruption to the front yard parking spaces.

Existing Tree Canopy Preservation: The ordinance requires that 50% of the tree canopy on each developed be preserved with each application that proposes tree removal and replacement. The project will not preserve any of the existing trees as they have been deemed invasive by the Township Zoning Board Engineer. The project proposes replacing the existing invasive trees with 64 new compliant trees. The proposed replacement is a significant improvement from the existing site conditions both aesthetically and performance-wise in terms of integrity of the tree canopy within the immediate proximity of the subject property and therefore the benefits outweigh the detriments.

The tree professional who reviewed the existing site and proposed plans determined that the proposed removals require 22 replacement trees to be implemented under the ordinance. Per exhibits and testimony presented at the March 19, 2026 hearing, the project provides 64 replacement trees. This nearly 3x

replacement ratio will provide substantial benefit in mitigating onsite stormwater management while ensuring tree canopy on site long-term is healthy and viable.

Parking Lot Shade: The ordinance requires that all parking lot owners shall create 50% shade in the parking lots within 25 years. The proposed tree canopy will not create 50% shade in the parking lot. The proposed tree canopy is limited to perimeter landscaping as the majority of the site is occupied by the surface parking. The proposed landscaping plan will improve significantly upon the existing condition within the site by providing internal planting areas throughout the “core” of the site where only impervious coverage exists today. ~~and will provide an increased number of compliant trees than what is currently existing.~~ The revised site plan now provides a conforming tree replacement ratio and therefore meets the intent of general canopy goals of the landscape ordinance, but positioning onsite does not allow for this to shade 50% of parking areas. The benefits of the proposed landscaping plan outweigh the detriments.

Purpose of the Municipal Land Use Law

The granting of the variances will advance the purposes of the Municipal Land Use Law and promote the general welfare.

- Granting the requested variances will guide the appropriate use and development of the property in a manner that will promote the general welfare consistent with N.J.S.A. 40:55D-2.a. through the provision of an appropriate commercial building on a lot that is compliant with conditional uses of the B-2 District.
- The proposed project will provide adequate light, air, and open space; consistent with N.J.S.A. 40:55D-2.c.
- The proposed project will promote a more desirable visual environment through creative development techniques consistent with N.J.S.A. 40:55D-2.i. by redeveloping the property and substantially improving the Eagle Rock Avenue streetscape and commercial character.

Negative Criteria

Granting the variances will not result in a substantial detriment to the general welfare. The project proposes to demolish an existing condemned building and provides a particularly beneficial use that is similar to its previous commercial use in developing two restaurants for residents and consumers of the community with improve onsite infrastructure, landscaping, circulation and overall aesthetic appearance.

Granting the variances will likewise not result in a substantial impairment to the intent and purpose of the zone plan or zoning ordinance. The proposed fast-food restaurant-use is a permitted conditional use of the B-2 District.

The proposed project is also consistent with the 2019 Master Plan Update in advancing several goals/objectives of the 2019 Master Plan Reexamination, including;

- *Objective 9. "Promote a Desirable Visual Environment"*
- *Objective 16. "Encourage Economic Development and Redevelopment That Is Compatible with the Suburban Character of the Township"*
- *Principle 2. "Properly Locate Public, Commercial/Retail, Industrial, Residential and Service Uses"*

CONCLUSION

The requested variances are justified and meet the positive and negative proof standards and therefore can be granted. The applicant reserves the right to supplement the foregoing reasons with expert testimony at the Planning Board Hearing.

Q:\PRJ\12210-001 470EagleRock\PL\Working Files\SPP\2026-04-03 Planning Report and Justification of Variances_470 Eagle Rock Avenue(WO)_Rev5.docx

APPENDIX A

PLANNING TESTIMONY SLIDE DECK

The following appendix includes a copy of the slides provided (as presented) in conjunction with Professional Planning testimony at the April 16, 2026 BOA hearing.



PLANNING PRESENTATION

WEST ORANGE BOARD OF ADJUSTMENT
470 EAGLE ROCK AVENUE

MARCH 16, 2026
REVISED APRIL 16, 2026



470 EAGLE ROCK AVE | WEST ORANGE, NJ
CONDITIONAL USE RELIEF

MARCH 16, 2026


D(3) CONDITIONAL USE RELIEF			
PROVISION	REQ'D.	PROPOSED	COMPLIES
1. Site Plan filed	By licensed professional(s)	By licensed professional(s)	Y
2. Distance to other "Fast Food" uses	Min. 500 FT	320 FT	N
3. Distance to Residential District Boundary	Min. 1,000 FT	170 FT (west) 140-120 FT (south)	N
4. Min. Lot Area Min. Lot Frontage	30,000 SF 200 FT	45,713 SF	Y
		223.45 FT (Eagle Rock)	Y
		182.41 FT (Rosney)	N
5. Combined entrance widths	Min. 24 FT, Max. 30 FT	30 FT	Y
6. Distance between driveways on same lot	Min. 100 FT	128.2 FT	Y
7. Distance between driveway and intersection	Min. 100 FT (at radius)	13.2 FT (westerly) 166.75 FT (easterly)	N Y
8. Trash Enclosure	Screened from R.O.W.	Enclosed with board-on-board fencing and secured gate	Y
9. Sufficient Parking	Compliance with 25-12.2b Min. 36 spaces	48 spaces	Y
10. Yard Requirements	Compliant with B-2 bulk req's (Schedule B)	Compliant with B-2 front front- side, side and rear yard req's.	Y



470 EAGLE ROCK AVE | WEST ORANGE, NJ

MARCH 16, 2026

CONDITIONAL USE RELIEF

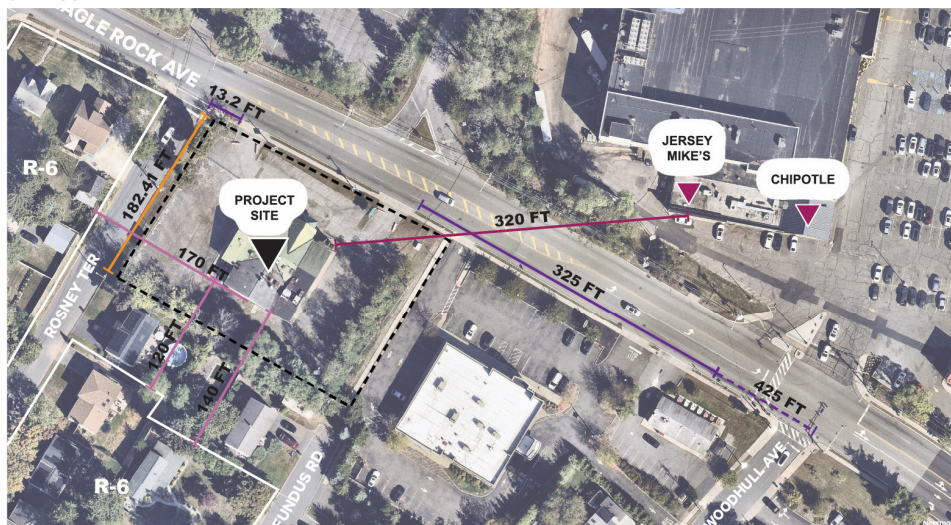

- DISTANCE FROM EXISTING FAST FOOD OPERATIONS
- DISTANCE FROM RESIDENTIAL DISTRICTS
- DISTANCE FROM DRIVEWAY APRON TO INTERSECTION
- LOT FRONTAGE
- SUBJECT PROPERTY

3



470 EAGLE ROCK AVE | WEST ORANGE, NJ

MARCH 16, 2026

CONDITIONAL USE RELIEF

EXISTING DRIVE UP WINDOW USES

- Identified 4 other fast food sites (including drive-up window) in WO
- 3 located in B-1 or B-2 where fast food is a conditional use (Burger King, McDonalds, Dunkin')
- 3 located on county roads
- All existing sites had similar non-conformities with Conditional Use requirements

TWP. WEST ORANGE EXISTING DRIVE-UP WINDOW LOCATIONS

PARC. No.	TAX BLOCK	TAX LOT	AREA (SF)	AREA (AC)	ZONE	BUSINESS NAME
1	152.22	1422	32,748.00	0.75	B-1	Burger King
2	168	27.03	47,872.00	1.099	B-2	McDonald's
3	168	27.02	51,615.00	1.18	B-2	Dunkin'
4	155.21	40	1,463,616.00	33.60	P-C	Starbucks at Essex Green Shopping Center
5	165	18	81,892.80	1.88	R-2	PNC Bank - 3 Lanes
6	71.01	50	24,132.24	0.55	OB-1	Ascendia Bank
7	105	64.01	28,366.27	0.65	B-2	Ascendia Bank - 2 lanes
8	153.14	33	62,924.00	1.44	B-2	Providence Bank - 2 lanes
9	176.05	12, 14	51,000.00	1.17	B-1	Chase Bank - 3 lanes
10	176.05	12.02	20,032.00	0.46	B-1	Kearny Bank
11	176.05	10	35,750.00	0.82	B-1	Columbia Bank - 2 lanes
12	152.22	1412.11	33,998.58	0.78	B-2	Valley National Bank - 2 lanes
13	176.03	12, 18, 20, 21	58,666.00	1.35	B-1	TD Bank - 4 lanes
14	153.16	1	123,122.34	2.29	B-2	CVS

4



BULK 'C' RELIEF			
PROVISION	REQ'D. / PERM.	EXISTING	PROPOSED
Min. Lot Area + Drive-up Window (AC)	5	1.05	1.05
Max. Impervious Coverage (%)	60	80.9*	75.0
Parking in Front Yard (spaces)	0 / Prohibited	11*	10
Max. Façade Signage (No.)	1 per use	N/A	4 – Fast Food 3 – Restaurant
Max. Façade Signage (SF)	120	N/A	229 (total)**
Curbing within 5FT of Structure	Prohibited	N/A	Curb along drive-through lane
Dedicated Loading Space	1	0	0 (striped)

*Existing non-conforming to be improved / reduced

** Max. SF of individual sign is 48.3 SF

DESIGN WAIVERS	
PROVISION	REQ'D. / PERM.
Tree Canopy Preservation (%)	50
Parking Lot Shade (% in 25 years)	50
Parking Area Lighting	2.0 FC

5



- Ordinance §25-11.14 has ~~40~~ 9 provisions regulating drive-up window businesses
- Application as proposed **meets 9 of the 40 all 9 criteria**, with exception of minimum lot area
- All provisions aim to **control for / mitigate circulation issues**, particularly with queuing for the drive-up lane
- Project as proposed **exceeds minimum required vehicular stacking capacity** of 6 spots
- Two egress configuration ensures onsite vehicles not utilizing the drive-through will be able to exit the site even if overflow queueing were to occur




6




IMPERVIOUS COVERAGE

- Reduction of existing non-conformity to 75%
- Most recent Landscape Plans **exceed tree replacement requirements by 15 trees 42 trees**, which are a key performance consideration in onsite stormwater management
- Landscape improvements focus on perimeter treatment to **buffer/mitigate visual impacts** on adjacent properties
- WAIVERS:
 - 50% Canopy Preservation
 - 50% Parking Area Shade in 25 years

LANDSCAPE PLAN (submitted 03.09.26)

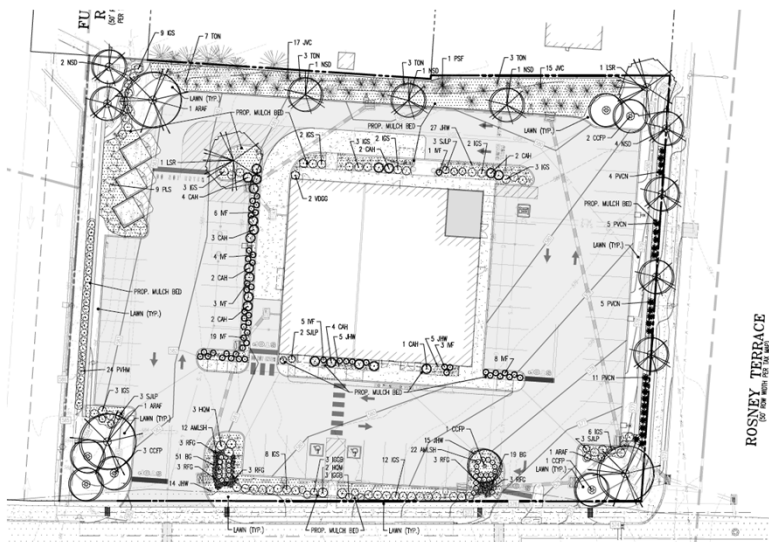

7

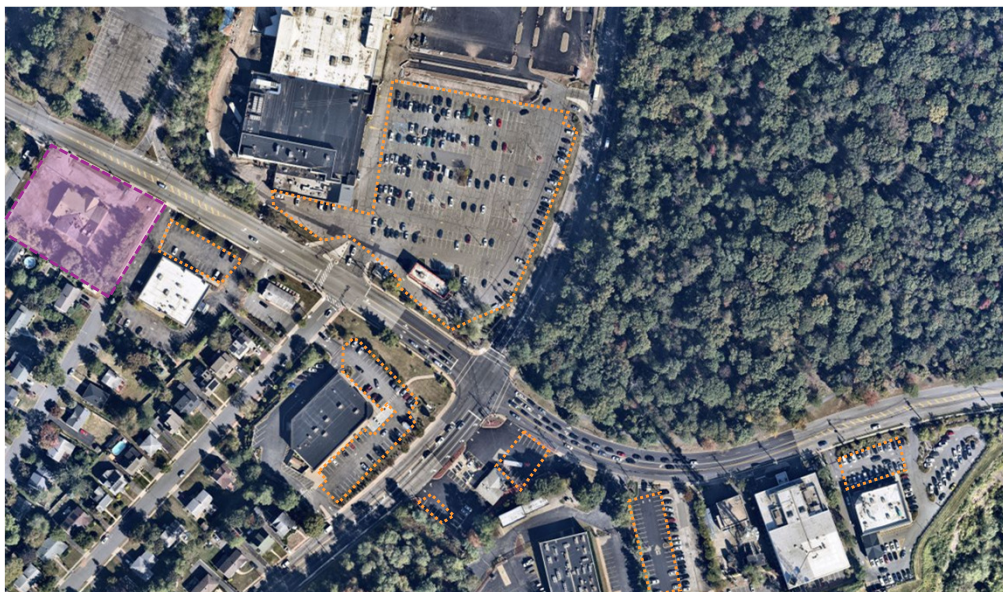


8



470 EAGLE ROCK AVE | WEST ORANGE, NJ

MARCH 16, 2026

CURBING + LOADING

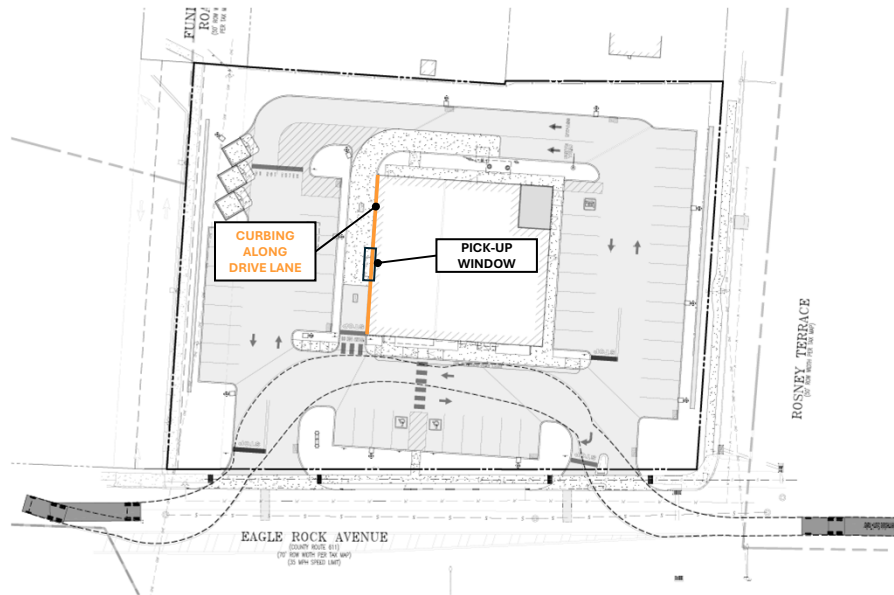


9



470 EAGLE ROCK AVE | WEST ORANGE, NJ

MARCH 16, 2026

SIGNAGE

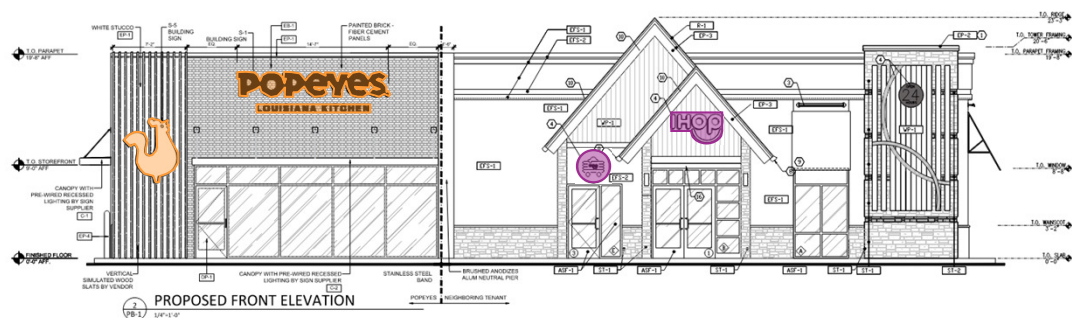


10

APPENDIX B

CORRECTED DISTANCES EXHIBIT

The following appendix includes an exhibit titled "Proposed Conditions Analysis - Conditional Use Relief - **Corrected Distances**" dated May 22, 2026.

The exhibit corrects distances noted on slides 2 and 3 of Appendix A wherein Board Members questioned the measurements provided and their consistency with the zoning ordinance at the April 16, 2026 hearing. The relevant measurements have been corrected to conform with the provisions of Chpt. 25-24.2.b.2(i)(2) regulations regarding distances from structures and driveways to nearby property lines with fast food uses.

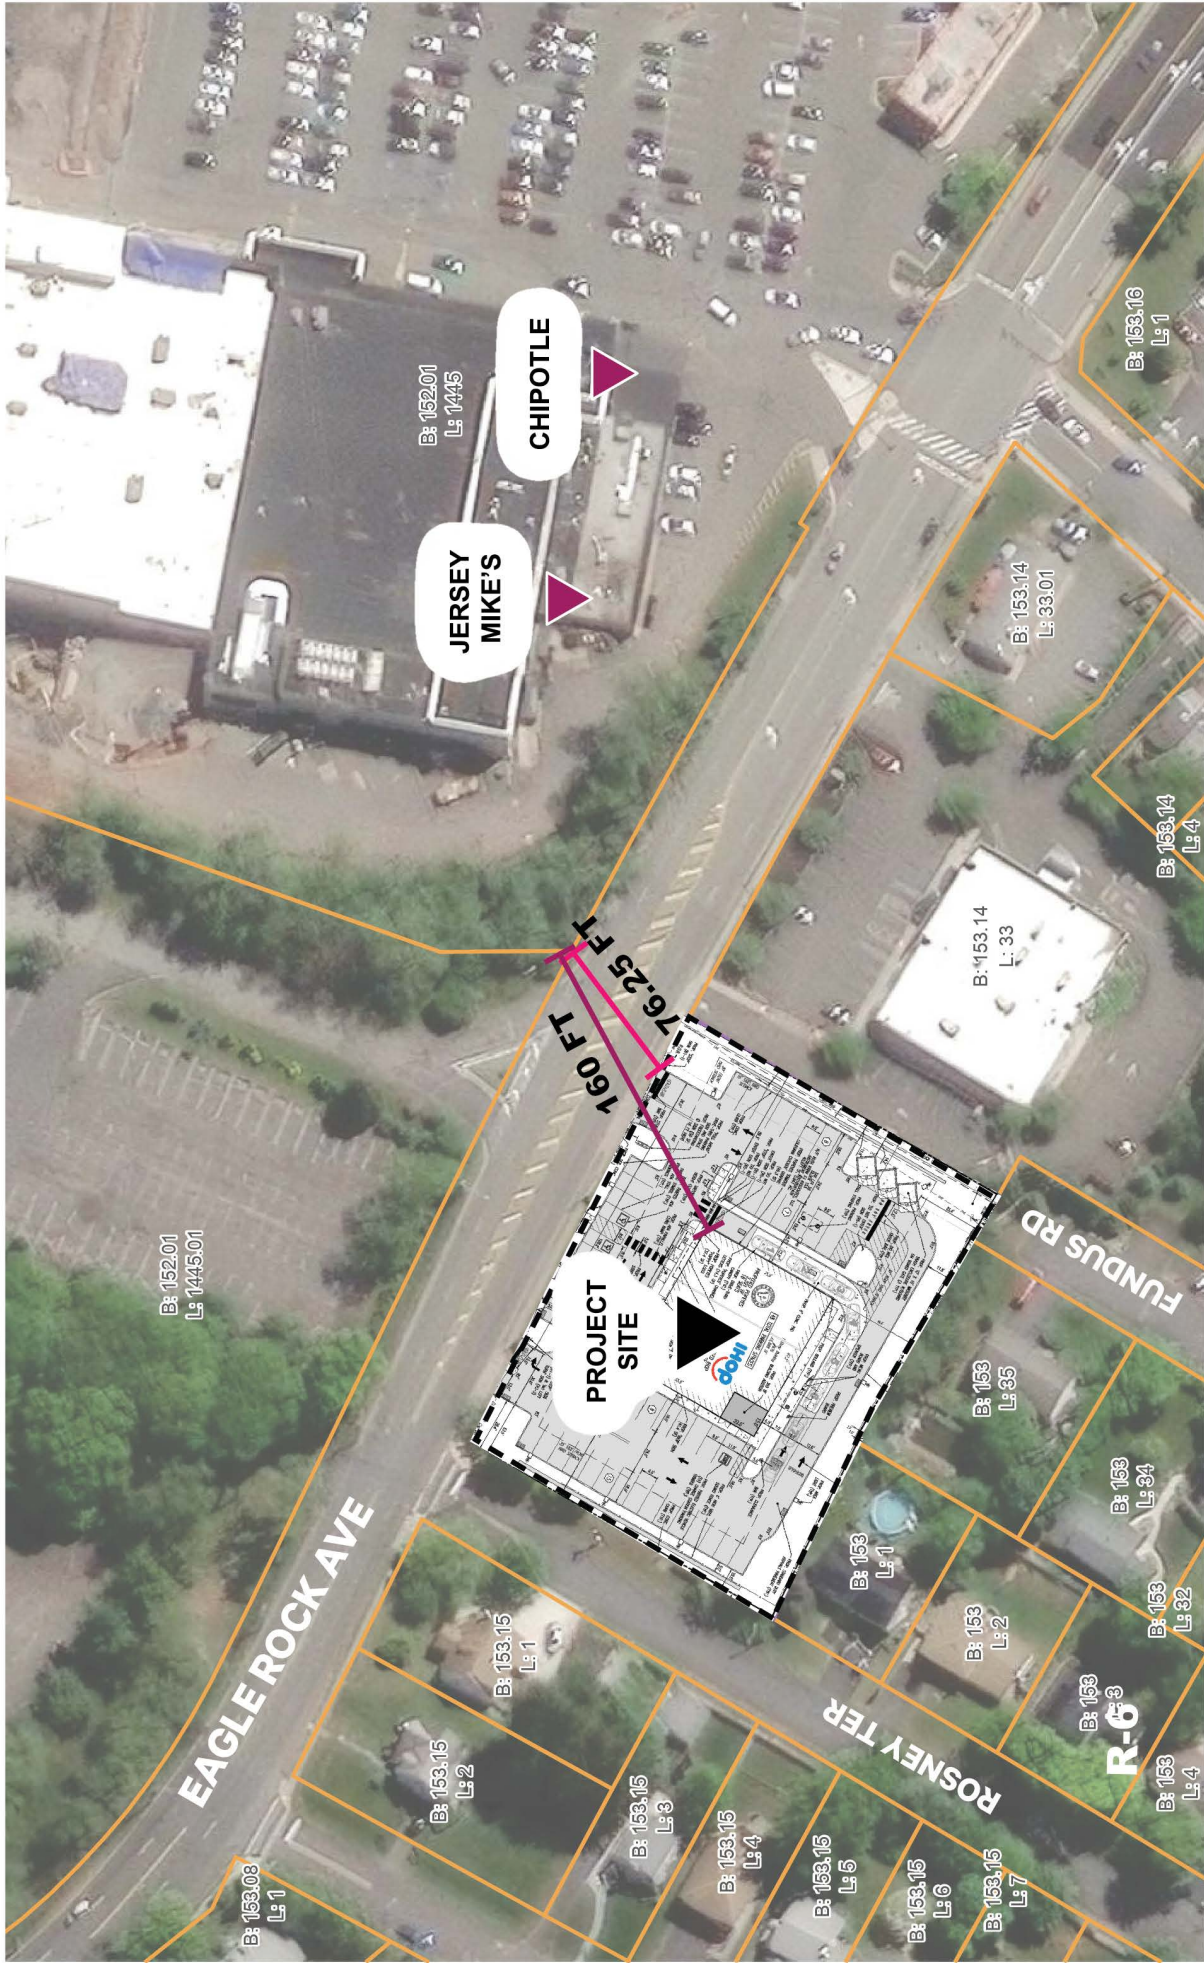

— DISTANCE FROM STRUCTURE TO PROPERTY LINE

— DISTANCE FROM DRIVEWAY TO PROPERTY LINE

— SUBJECT PROPERTY